


XCT/NCT 1268/1264 EZGO FOR SHUNT (SEPERATELY EXCITED) WOUND MOTORS

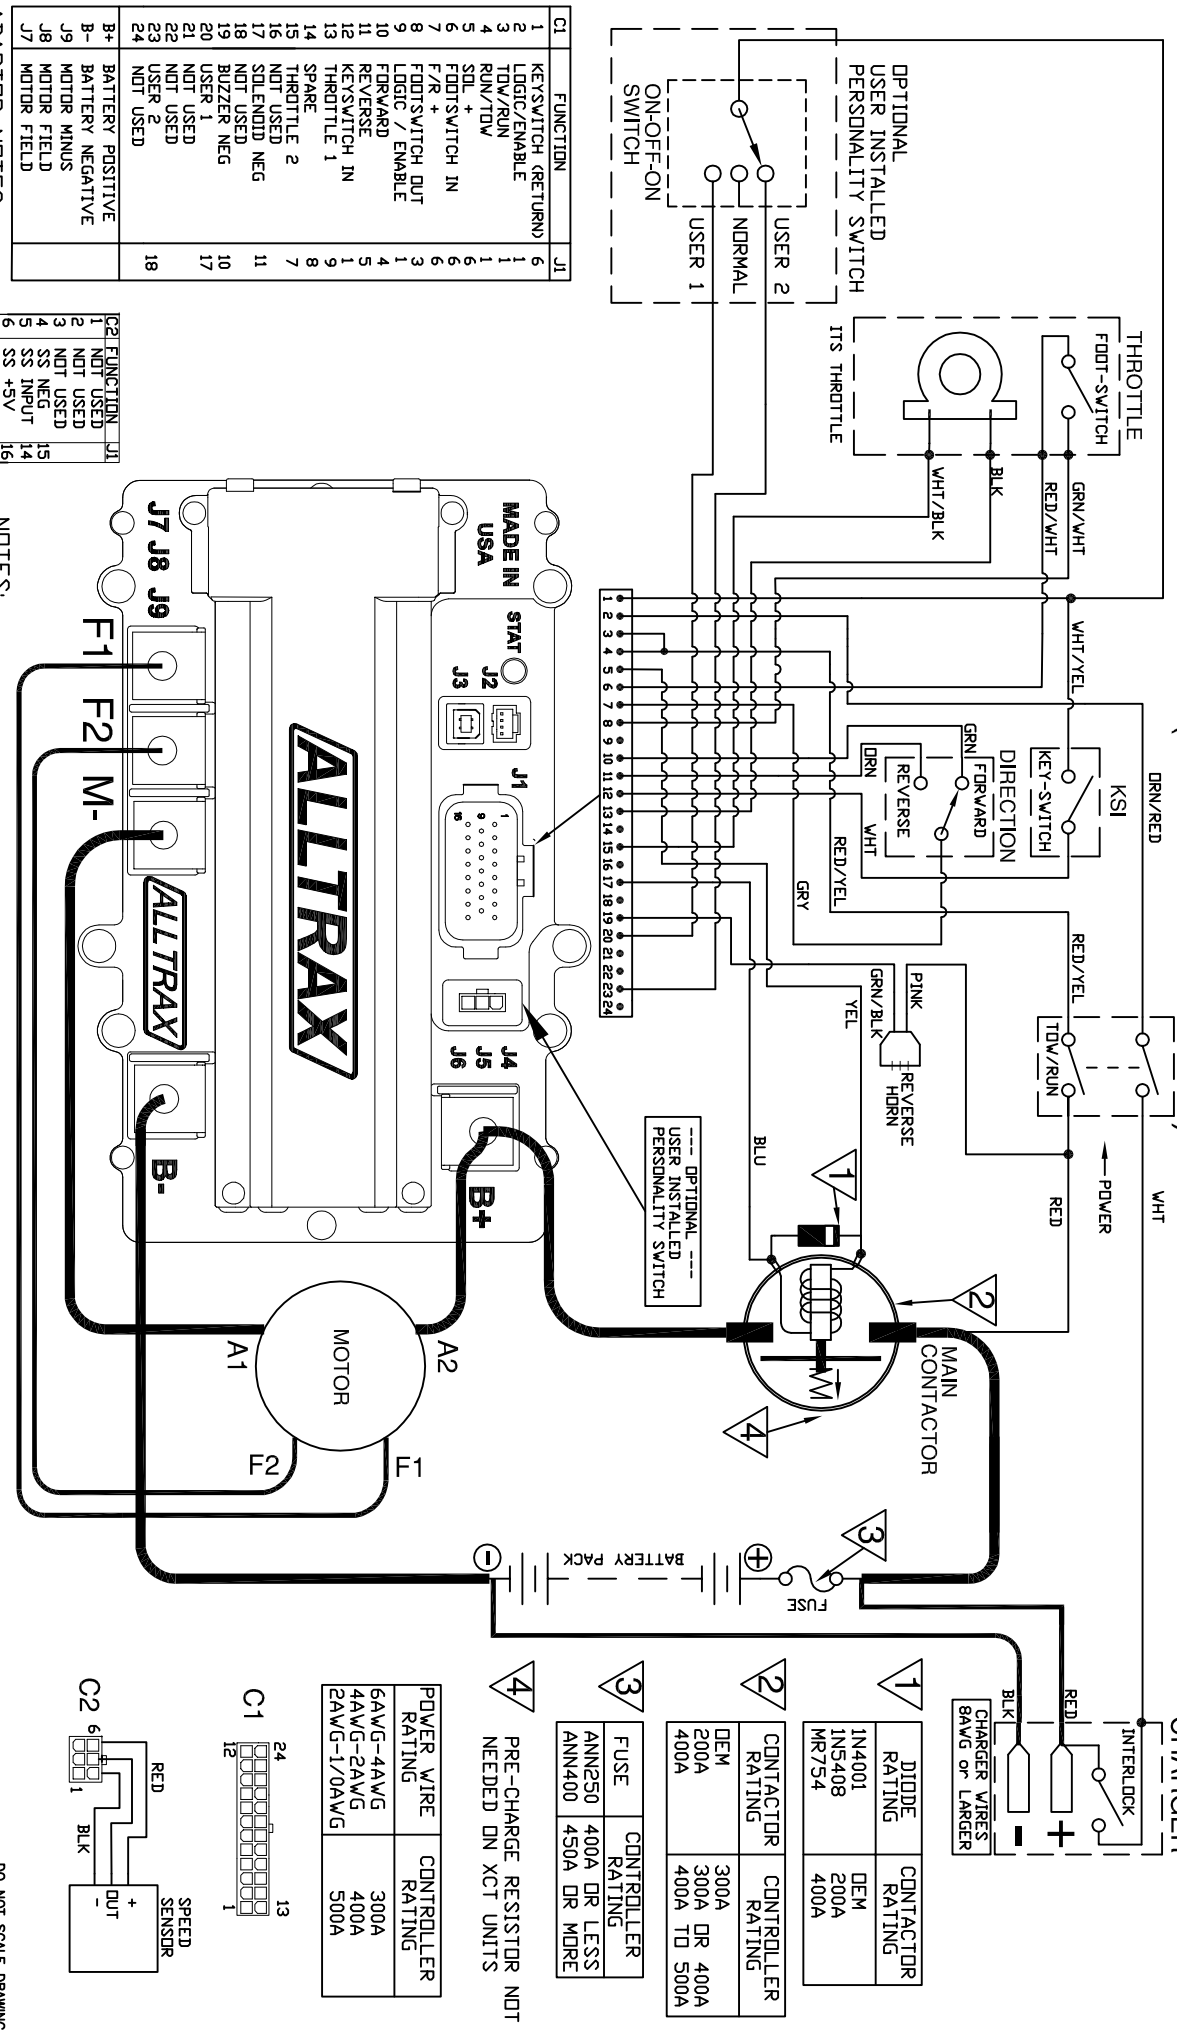

ADAPTOR NOTES:

C1	ADAPTOR CONNECTS CONTROLLER TO HARNESS
C2	ADAPTOR CONNECTS CONTROLLER TO SPEED SENSOR
> THE ABOVE KEYS SHOW WHERE WIRES FROM J1 CONNECT TO C1/C2	
SS	= SPEED SENSOR

NOTES:

- * FUSES REQUIRED FOR ALL INSTALLATIONS
- * DIODE REQUIRED ACROSS COILS / RELAYS
- * TOW/RUN SWITCH PREVENTS REGEN WHILE TOWING
- * ASSUMES FDDTSWITCH IS OPEN WHEN THROTTLE OFF
- * ALLTRAX RESERVES THE RIGHT TO CHANGE DOCUMENTATION WITHOUT NOTICE
- * ALLTRAX MAKES NO WARRANTY AS TO THE ACCURACY, SUFFICIENCY OR SUITABILITY OF ANY TECHNICAL OR OTHER INFORMATION PROVIDED
- > SEE OPERATORS MANUAL FOR MORE INFORMATION

REVISIONS

REV.	ECO.	DATE	APVD
A	070118	100818	VH

DWG SCALE: NTS

DRAWN	W. HOPPER	070118
ENGR	D.Crockett	060818

PROPRIETARY

THIS TECHNICAL DATA IS PROPRIETARY AND ALL RIGHTS ARE RESERVED. REPRODUCTION OR DISSEMINATION IN WHOLE OR IN PART WITHOUT THE PERMISSION OF ALLTRAX INC.

TITLE XCT 1268 / 1264 EZGO

Wiring Diagram

SIZE DOCUMENT NO. DOC110-050

REV. A

FILE: _DWG-XCT-1268-1264-EZGO.DWG

SHEET 1 of 1

DO NOT SCALE DRAWING

ALLTRAX 1111 Cheney Creek Rd.
Greens Pass, OR 97527
PHONE:(541) 476-3565